




**01 - 01.3**  
10.19.GB

# SELF-ACTING PRESSURE REGULATORS

## **200 line**

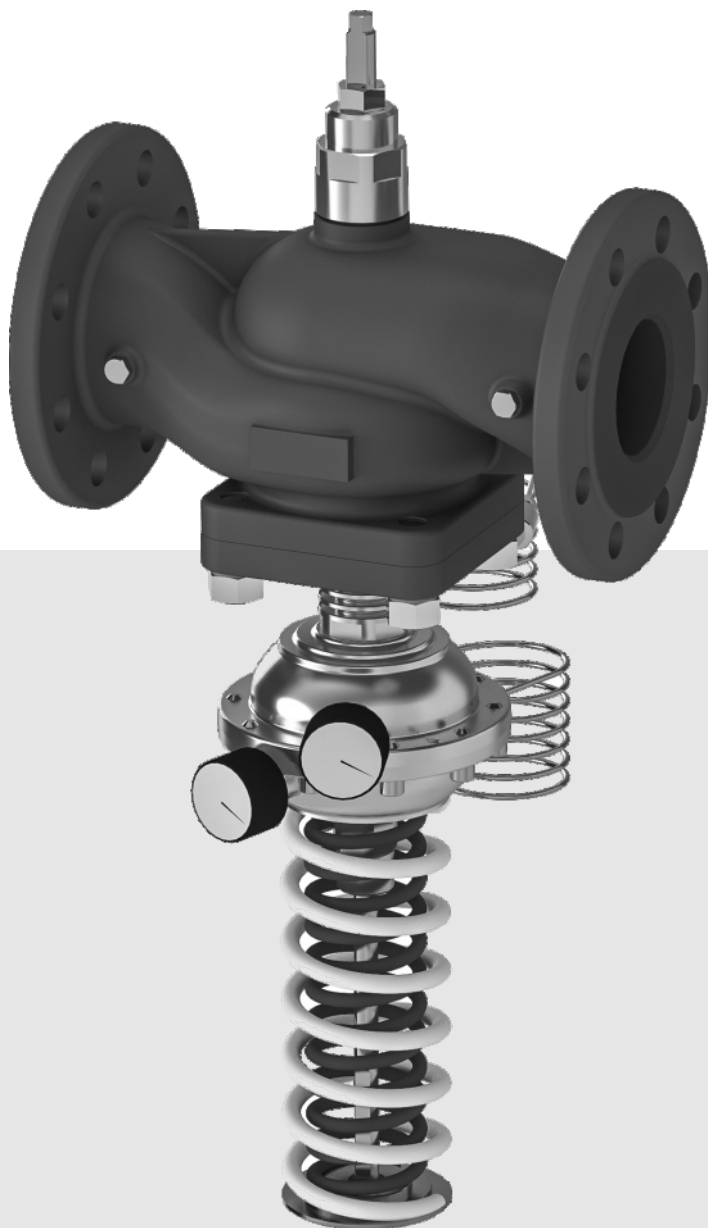

# 200 line



## Application

These valves are designed for applications in common warm-water and hot-water heating circuits, refrigeration and air-conditioning with max. pressure differential of 1.6 MPa.

Throttling application with the presence of cavitation is permissible but it is inevitable to expect increased wear of throttling system.

## Process media

Valves series **RD 2xx** are suitable for process media such as water, air or steam up to 1.0 MPa. In addition they are suitable for cooling mixtures and other non-aggressive media and gases with temperature range +2 °C to +150 °C, alternatively with condensate wells up to 180°C. Sealing surfaces of the trim are resistant to common sludge or media impurities. Yet it is recommended to pipe a strainer in front of the valve to ensure a reliable function and tightness in the case of abrasive particles presence in the process medium.


## Installation

Basic operating position of regulator is when the valve body is above its controlling head that points downwards. This position must be particularly kept when reducing steam pressure or when temperature exceeds 90 °C. For gaseous and liquid media of lower temperatures valve can be installed also on the vertical piping or on the horizontal piping with head oriented sideways. The controlling head can be rotated along its axis after the installation as required by the space disposition needs.


Impulse pipelines for extraction of the pressure from the body or the pipeline are within the scope of supply as standard.

## Typical scheme of wiring for RD 212 D; P; V (rising pressure / pressure difference closes the valve)

Scheme of typical regulation loop with differential pressure regulator RD 212 D (P) at secondary side

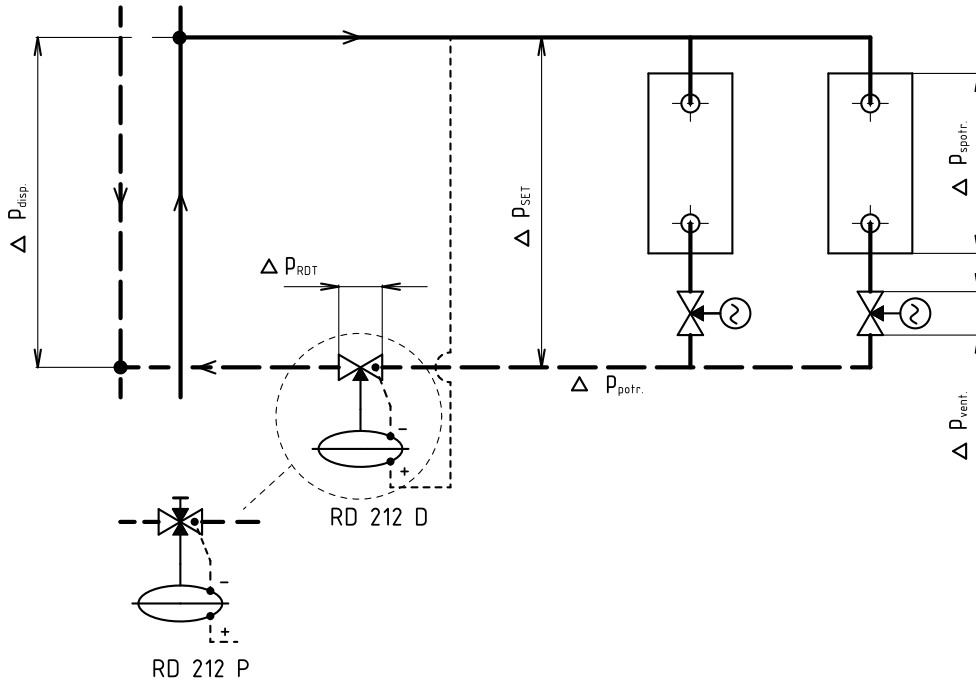


Scheme of typical regulation loop with differential pressure regulator RD 212 D at primary side

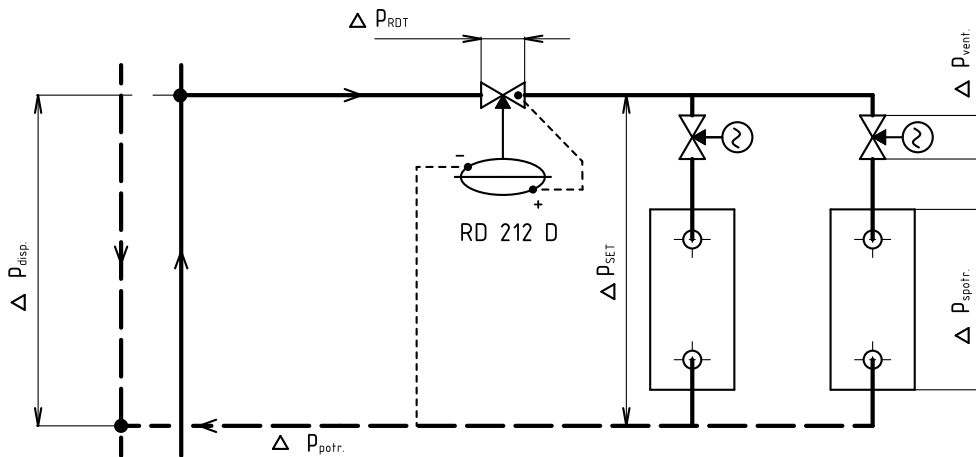


### Basic scheme of piping for outlet pressure regulator RD 212 V

- with input of pressure signal from sample point on the pipeline

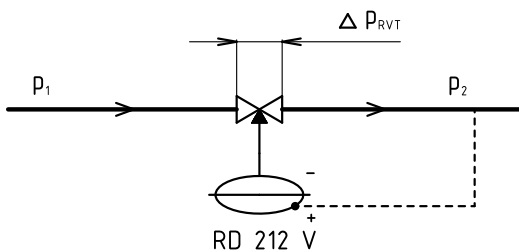


- with input of pressure signal from sample point on the valve

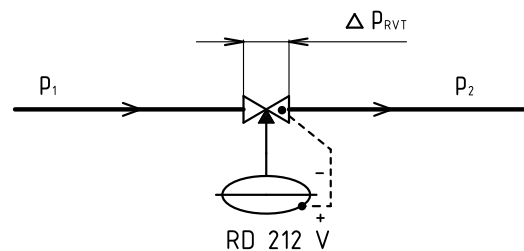


## Typical scheme of wiring for RD 213 R; S (rising pressure or pressure difference opens the valve)

Scheme of typical regulation loop with bypass valve RD 213 R (S) in the crossover

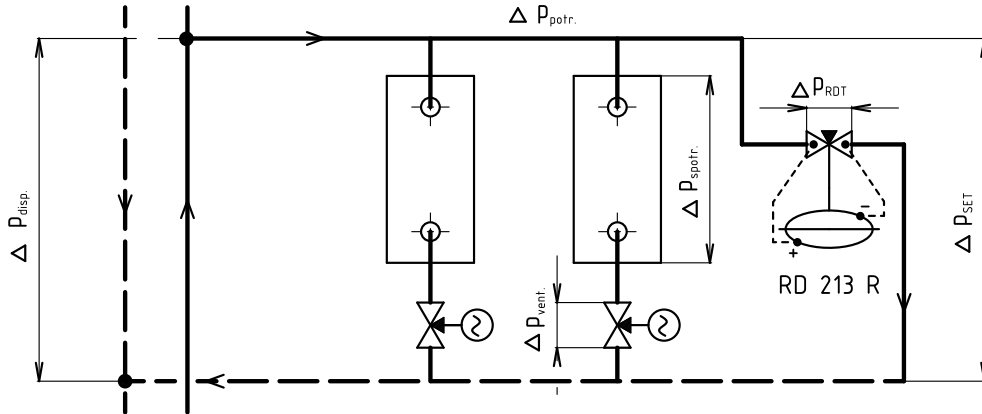


### Basic scheme of piping for input pressure regulator RD 213 S


- with input of pressure signal from sample point on the pipe

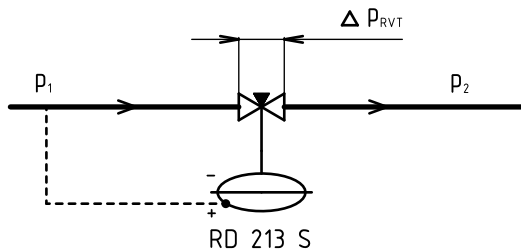


- with input of pressure signal from sample point on the valve

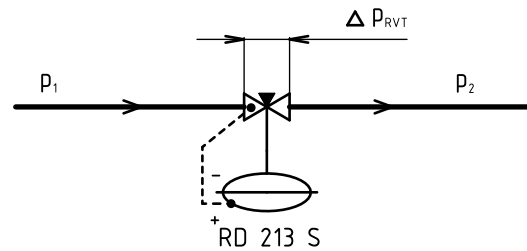

### Scheme of piping for bypass valve RD 213 R in by-pass of the pump

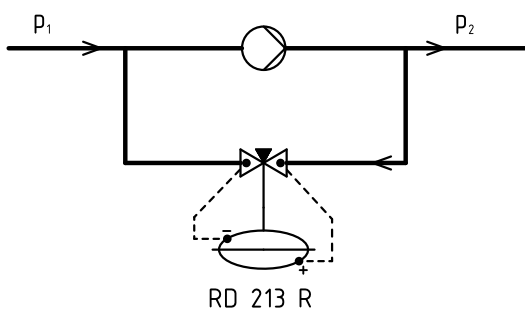

### Scheme of piping for input pressure regulator RD 213 S in by-pass of the pump

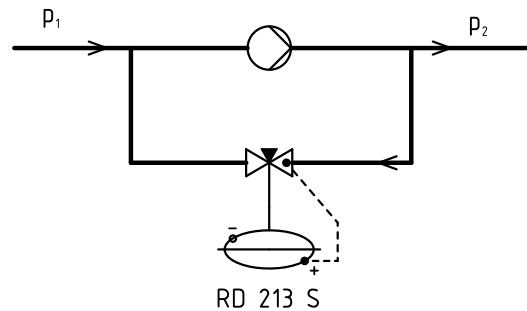



# RD 212 D RD 212 P RD 212 V

## 200 line

**DN 65 - 150**  
**PN 16, 25**

**Self-acting regulator of differential pressure RD 212 D** is designed to keep constant differential pressure value of given appliance. Such a function is ensured by a diaphragm exposed to the effects of inlet and outlet pressure of the appliance. Deflection of the diaphragm is transferred to the valve plug and it closes the valve upon increase of differential pressure value.

**Self-acting regulator of differential pressure with flow restrictor RD 212 P** ensures requirement for restriction of maximum flow through the appliance apart from its basic function (keeping constant differential pressure value). This function is provided by a secondary plug adjusted for the required maximum flow by the operator.

**Self-acting regulator of output pressure RD 212 V** is designed to reduce output pressure of the appliance and to maintain it on set value. This function is enabled by a diaphragm exposed to the effects of the outlet pressure and actuated by a spring from the second side. Deflection of the diaphragm is transferred to the valve plug and it closes the valve upon increase of output pressure value.

In case when required value of regulated pressure quantity is within scope of two spring ranges, it is recommended to choose the spring with lower values to ensure sensitivity of the regulator. Owing to a pressure-balanced plug, value of differential pressure is not affected by pressure conditions within the valve.

Technical data			
Series	RD 212 D	RD 212 P	RD 212 V
Version	Differential pressure regulator	Differential pressure regulator with flow restrictor	Output pressure regulator
Function	The valve closes upon increase of differential pressure value		The valve closes upon increase of output pressure value.
Nominal diameter range	DN 65 to 150		
Nominal pressure	PN 16, 25		
Body material	Nodular cast iron EN-JS1025		
Plug material	Stainless steel 1.4021		
Seat material	Stainless steel 1.4028 + PTFE		
Stem material	Stainless steel 1.4305		
Diaphragm and sealing material	EPDM		
Bonnet of diaphragm chamber material	Nodular cast iron, carbon steel		
Operating temperature range	+2 °C to +150 °C, version with condensate wells up to +180°C		
Connection	Flanges with raised face		
Plug type	V-ported, pressure-balanced		
Kvs values	76 to 235 m <sup>3</sup> /hr	72 to 215 m <sup>3</sup> /hr	76 to 235 m <sup>3</sup> /hr
Leakage rate	Class IV. acc. to ČSN-EN 1349 (< 0.01 % Kvs)		
Leakage rate of flow resistor	---	not guaranteed	---
Range of adjustable work. pressure values $\Delta p_{set}$	Chamber 240 cm <sup>2</sup> : 15 - 60; 20 - 100; 32 - 160 kPa Chamber 64 cm <sup>2</sup> : 45 - 225; 75 - 375; 120 - 600 kPa Chamber 36 cm <sup>2</sup> : 240 - 1000 kPa		

Tolerance of the start and end values from the setting range is  $\pm 10\%$

## Specification code for ordering of valves RD 212 D, RD 212 P and RD 212 V

		XX	XXX	XXXX	XXXX	XX	/	XXX	-	XXX	
<b>1. Valve</b>	Self-acting pressure regulator	<b>RD</b>									
<b>2. Series</b>	Pressure-balanced		<b>212</b>								
<b>3. Function</b>	Differential pressure regulator			<b>D</b>							
	Differential pressure regulator			<b>P</b>							
	Differential pressure regulator with flow restrictor			<b>V</b>							
<b>4. Version</b>	With diaphragm 240 cm <sup>2</sup>									<b>1</b>	
	With diaphragm 64 cm <sup>2</sup>									<b>2</b>	
	With diaphragm 36 cm <sup>2</sup>									<b>3</b>	
<b>5. Equipment</b>	Without manometer(s)									<b>0</b>	
	With manometer(s) <sup>1)</sup>									<b>1</b>	
<b>6. Range of pressure setting / spring colour</b>	Diaphragm 240 cm <sup>2</sup>	15 - 60 kPa / red								<b>1</b>	
		20 - 100 kPa / yellow								<b>2</b>	
		32 - 160 kPa / red + yellow <sup>2)</sup>									<b>3</b>
	Diaphragm 64 cm <sup>2</sup>	45 - 225 kPa / red									<b>4</b>
		75 - 375 kPa / yellow									<b>5</b>
	Diaphragm 36 cm <sup>2</sup>	120 - 600 kPa / red + yellow <sup>3)</sup>									<b>6</b>
		240 - 1000 kPa / red + yellow									<b>7</b>
<b>7. Connection</b>	Flange RF (Raised face)									<b>1</b>	
	Other connection after agreement									<b>9</b>	
<b>8. Body material</b>	Nodular cast iron EN-JS1025									<b>4</b>	
	Other material after agreement									<b>9</b>	
<b>9. Impulse pipeline</b>	Standard 1.6 m									<b>1</b>	
	Extended 2.5 m									<b>2</b>	
	Lenght 1.6 m, with cock valve R 1/4									<b>3</b>	
	Extended 2.5 m, with cock valve R 1/4									<b>4</b>	
	Other configuration after agreement									<b>9</b>	
<b>10. Kvs</b>	According to Kvs table									<b>X</b>	
<b>11. Nominal pressure</b>	PN 16									<b>16</b>	
	PN 25									<b>25</b>	
<b>12. Max. operating temp.</b>	150°C									<b>150</b>	
	With condensate wells up to 180°C									<b>180</b>	
<b>13. Nominal size</b>	DN 65 to 150									<b>XXX</b>	

Ordering example: **RD212 D102 1411 16/150-065**

### Kvs values table

DN	Kvs [m <sup>3</sup> /hr]		
	RD 212 D	RD 212 V	RD 212 P
<b>code value</b>	<b>1</b>		<b>6</b>
<b>65</b>	76		72
<b>80</b>	100		100
<b>100</b>	140		130
<b>125</b>	190		182
<b>150</b>	235		215



# RD 213 R

# RD 213 S

## 200 line

**DN 65 - 150**  
**PN 16, 25**

**Self-acting bypass valve RD 213 R** is designed to by-pass appliance when set pressure difference is exceeded. Such a function is ensured by a diaphragm exposed to the effects of inlet and outlet pressure of the appliance. Deflection of the diaphragm is transferred to the valve plug and it opens the valve upon increase of differential pressure value.

**Self-acting regulator of input pressure RD 213 S** is designed to limit maximum pressure in the system. Diaphragm is exposed to the pressure from the pipe and the increase of this pressure over set value causes opening of the valve.

In case when required value of regulated pressure quantity is within scope of two spring ranges, it is recommended to choose the spring with lower values to ensure sensitivity of the regulator. Owing to a pressure-balanced plug, value of controlled pressure is not affected by pressure conditions within the valve.

Technical data		
Series	RD 213 R	RD 213 S
Version	<b>Bypass valve</b>	<b>Input pressure regulator</b>
Function	The valve opens upon increase of differential pressure value	The valve opens upon increase of controlled pressure value
Nominal diameter range	DN 65 to 150	
Nominal pressure	PN 16, 25	
Body material	Nodular cast iron EN-JS1025	
Plug material	Stainless steel 1.4021	
Seat material	Stainless steel 1.4028 + PTFE	
Stem material	Stainless steel 1.4305	
Diaphragm and sealing material	EPDM	
Bonnet of diaphragm chamber material	Nodular cast iron, carbon steel	
Operating temperature range	+2°C to +150°C, version with condensate wells up to +180°C	
Connection	Flanges with raised face	
Plug type	V-ported, pressure-balanced	
Kvs values	76 to 235 m <sup>3</sup> /hr	
Leakage rate	Class IV. acc to ČSN-EN 1349 (< 0.01 % Kvs)	
Range of adjustable work. pressure values $\Delta p_{set}$	Chamber 240 cm <sup>2</sup> : 5 - 50; 10 - 80; 15 - 130 kPa Chamber 64 cm <sup>2</sup> : 20 - 200; 30 - 300; 50 - 500 kPa Chamber 36 cm <sup>2</sup> : 100 - 1000 kPa	

Tolerance of the start and end values from the setting range is  $\pm 10\%$ .

## Specification code for ordering of valves RD 213 R, RD 213 S

		XX	XXX	XXXX	XXXX	XX	/	XXX	-	XXX
<b>1. Valve</b>	Self-acting pressure regulator	<b>RD</b>								
<b>2. Series</b>	Pressure-balanced		<b>213</b>							
<b>3. Function</b>	Self-acting bypass valve			<b>R</b>						
	Input pressure regulator			<b>S</b>						
<b>4. Version</b>	Diaphragm 240 cm <sup>2</sup>				<b>1</b>					
	Diaphragm 64 cm <sup>2</sup>				<b>2</b>					
	Diaphragm 36 cm <sup>2</sup>				<b>3</b>					
<b>5. Equipment</b>	Without manometer(s)					<b>0</b>				
	<sup>1)</sup> With manometer(s)					<b>1</b>				
<b>6. Range of pressure setting / spring colour</b>	Diaphragm 240 cm <sup>2</sup>		5 - 50 kPa / red			<b>1</b>				
			10 - 80 kPa / yellow			<b>2</b>				
			15 - 130 kPa / red + yellow <sup>2)</sup>			<b>3</b>				
	Diaphragm 64 cm <sup>2</sup>		20 - 200 kPa / red			<b>4</b>				
			30 - 300 kPa / yellow			<b>5</b>				
			50 - 500 kPa / red + yellow <sup>3)</sup>			<b>6</b>				
	Diaphragm 36 cm <sup>2</sup>		100 - 1000 kPa / red + yellow			<b>7</b>				
<b>7. Connection</b>	Flange RF (Raised face)					<b>1</b>				
	Other connection after agreement					<b>9</b>				
<b>8. Body material</b>	Nodular cast iron EN-JS1025					<b>4</b>				
	Other material after agreement					<b>9</b>				
<b>9. Impulse pipeline</b>	Standard 1.6 m					<b>1</b>				
	Extended 2.5 m					<b>2</b>				
	Lenght 1.6 m, with cock valve R 1/4					<b>3</b>				
	Extended 2.5 m, with cock valve R 1/4					<b>4</b>				
	Other configuration after agreement					<b>9</b>				
<b>10. Kvs</b>	According to Kvs table							<b>X</b>		
<b>11. Nominal pressure</b>	PN 16								<b>16</b>	
	PN 25								<b>25</b>	
<b>12. Max. operating temp.</b>	150°C									<b>150</b>
	With condensate wells up to 180°C									<b>180</b>
<b>13. Nominal size</b>	DN 65 to 150									<b>XXX</b>

Ordering example: **RD213 R102 1411 16/150-065**


### Kvs values

DN	Kvs [m <sup>3</sup> /hr]	
	RD 213 R	RD 213 S
code value	<b>1</b>	
<b>65</b>	76	
<b>80</b>	100	
<b>100</b>	140	
<b>125</b>	190	
<b>150</b>	235	




## Dimension sketches of valves


Version RD 212 D (chamber 240 cm<sup>2</sup>)

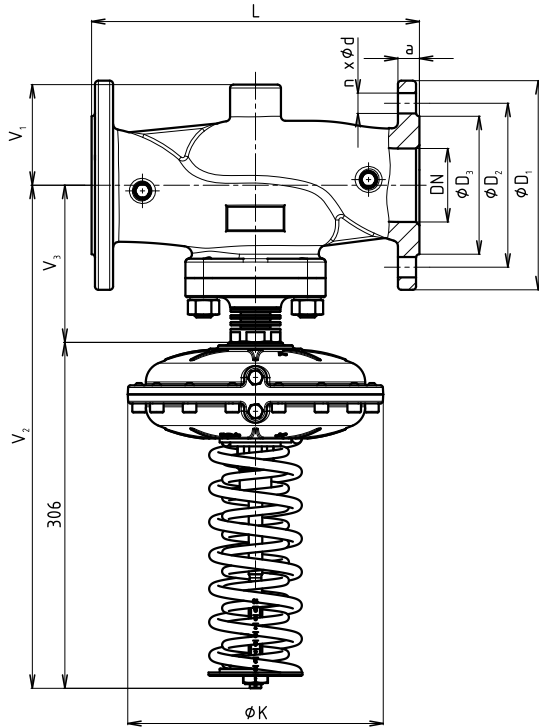


Version RD 212 P (chamber 64 cm<sup>2</sup>)

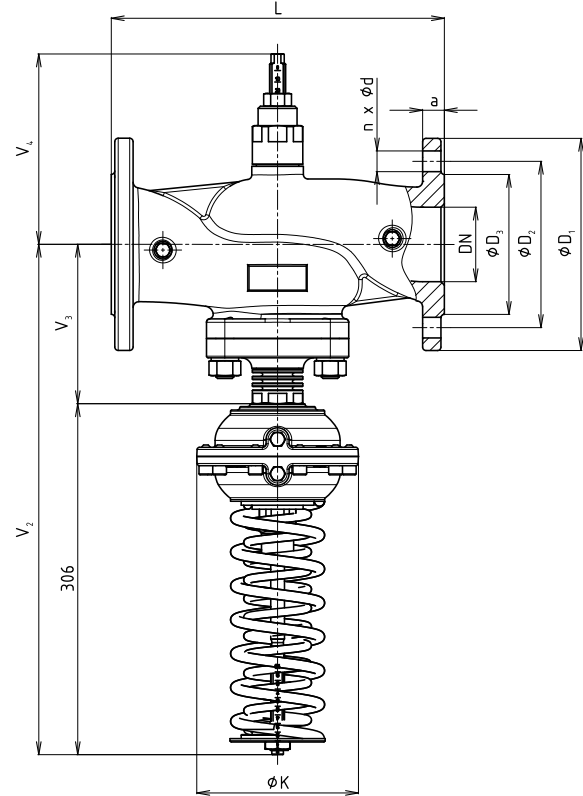


Version RD 212 V (chamber 240 cm<sup>2</sup>)

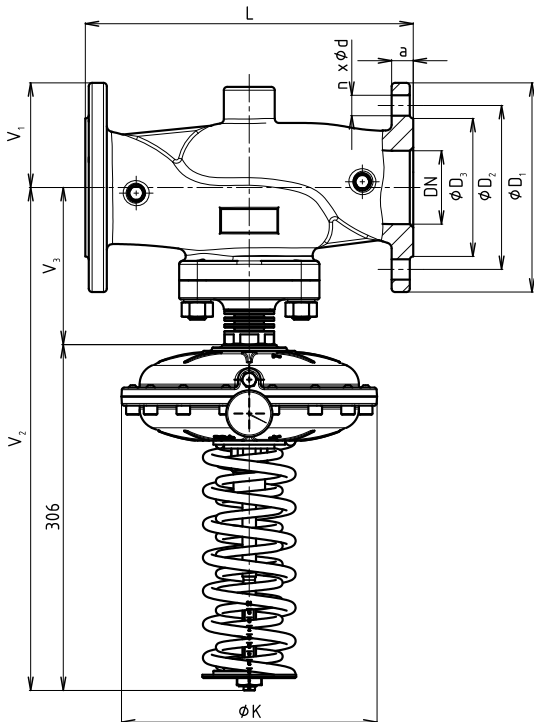

Version RD 213 R with manometers (chamber 64 cm<sup>2</sup>)

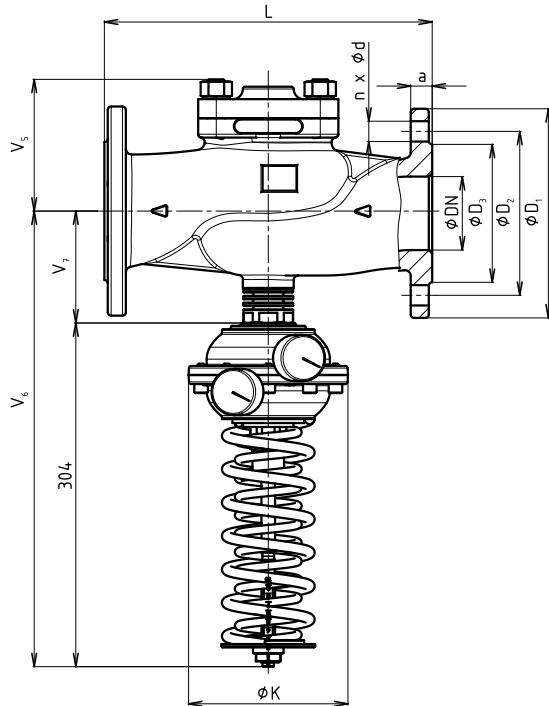

Version RD 213 S (chamber 36 cm<sup>2</sup>)

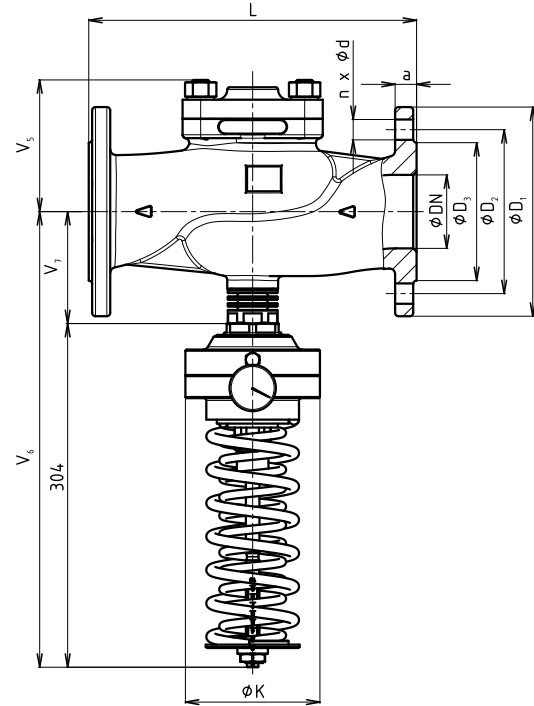

### Connecting dimensions

DN	PN16						PN25					
	ØD <sub>1</sub> [mm]	ØD <sub>2</sub> [mm]	ØD <sub>3</sub> [mm]	a [mm]	n	Ød [mm]	ØD <sub>1</sub> [mm]	ØD <sub>2</sub> [mm]	ØD <sub>3</sub> [mm]	a [mm]	n	Ød [mm]
65	185	145	118	19	4	19	185	145	118	19	8	19
80	200	160	132	19	8	19	200	160	132	19	8	19
100	220	180	156	19	8	19	235	190	156	19	8	23
125	250	210	184	23.5	8	19	270	220	184	23.5	8	28
150	285	240	211	26	8	23	300	250	211	26	8	28

### Dimensions and weights of RD 2xx

Function	D, V, P					R, S			D, V, R, S		P		Diameter of controlling head K		
	L [mm]	V <sub>1</sub> [mm]	V <sub>2</sub> [mm]	V <sub>3</sub> [mm]	V <sub>4</sub> [mm]	V <sub>5</sub> [mm]	V <sub>6</sub> [mm]	V <sub>7</sub> [mm]	m <sub>1</sub> <sup>*)</sup> [kg]	m <sub>2</sub> <sup>*)</sup> [kg]	m <sub>3</sub> <sup>*)</sup> [kg]	m <sub>4</sub> <sup>*)</sup> [kg]	240 cm <sup>2</sup> [mm]	64 cm <sup>2</sup> [mm]	36 cm <sup>2</sup> [mm]
DN															
65	290	93	445	139	166	117	403	99	26	23	27	24	226	141	119
80	310	105	490	184	196	152	447	143	38	35	39	36	226	141	119
100	350	118	490	184	196	152	447	143	45	42	47	44	226	141	119
125	400	135	509	203	224	180	475	171	72	69	76	73	226	141	119
150	480	150	526	220	224	200	475	171	104	101	107	104	226	141	119


<sup>\*)</sup> m<sub>1</sub>, m<sub>3</sub> ... weight of valves with 240 cm<sup>2</sup> diaphragm

<sup>\*)</sup> m<sub>2</sub>, m<sub>4</sub> ... weight of valves with 36 and 64 cm<sup>2</sup> diaphragm

## Accessories

### Standard impulse pipeline for supply of pressure impulse into regulator


It is in the scope of supply as standard

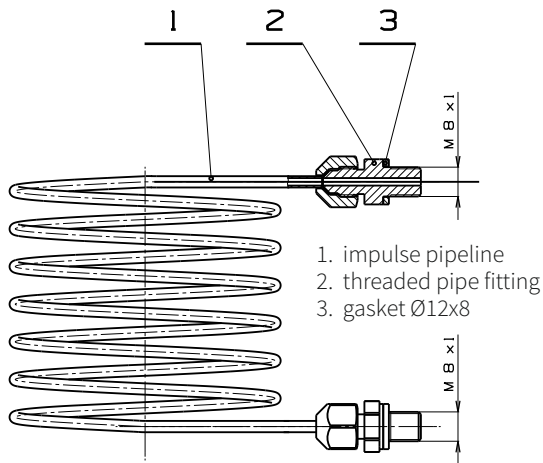


### Weld female connector for connection of impulse pipeline

It is in the scope of supply as standard

Material: **1.0036 / 11 373.0**  
Ordering code: **VM 43 0046**




### Impulse pipeline with shut-off cock valve and connection thread 1/4"

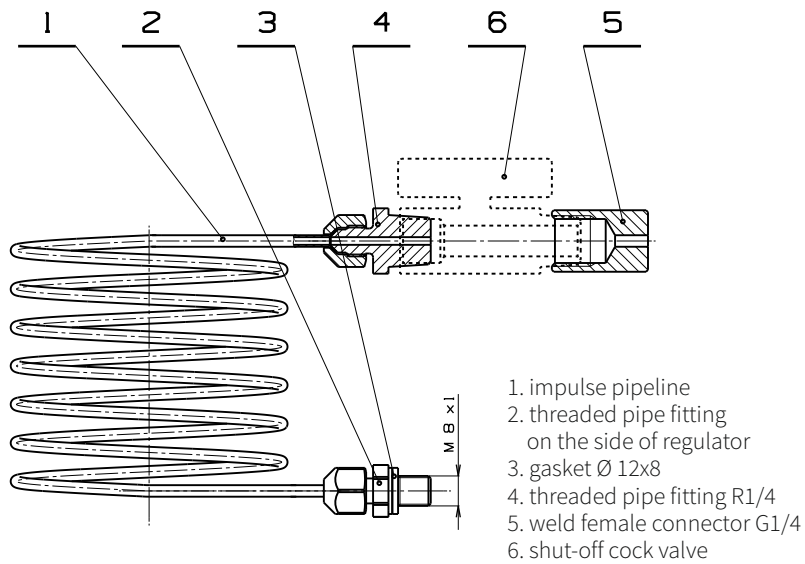

### Cooling condensate well



It is in the scope of supply for higher temperature version of valve (up to 180°C)

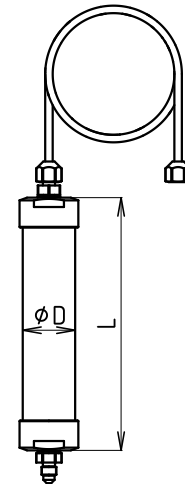

Dimension table of condensate wells

Diaphragm	L	ØD
240 cm <sup>2</sup>	440	42
64 cm <sup>2</sup>	140	42
32 cm <sup>2</sup>	135	28


## Operating charts of RD 212 D, RD 212 P, RD 212 V (the valve closes upon increase of pressure / pressure difference)

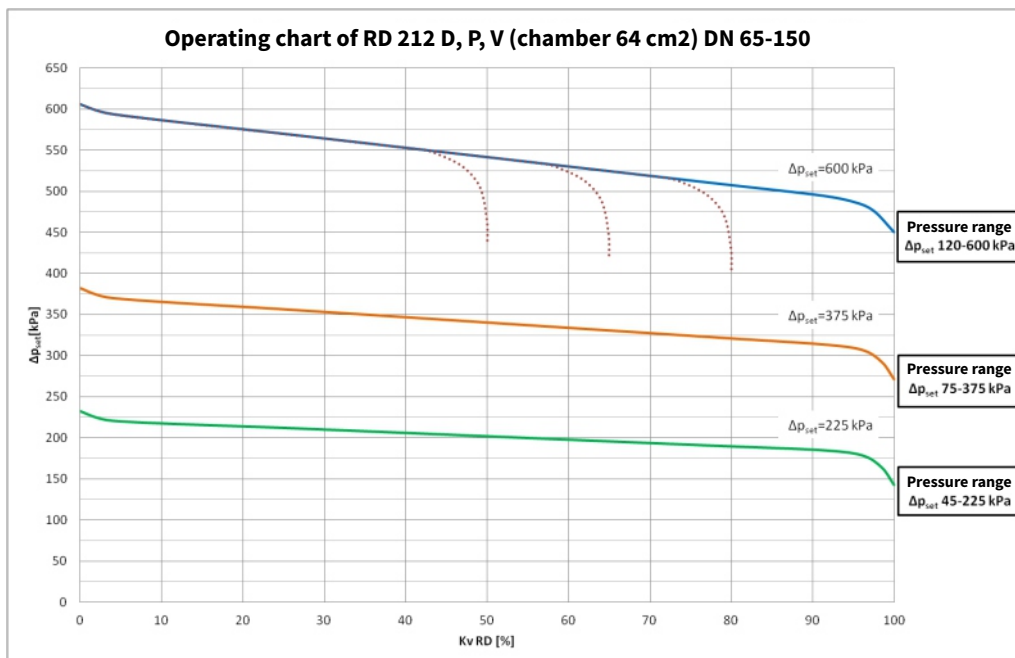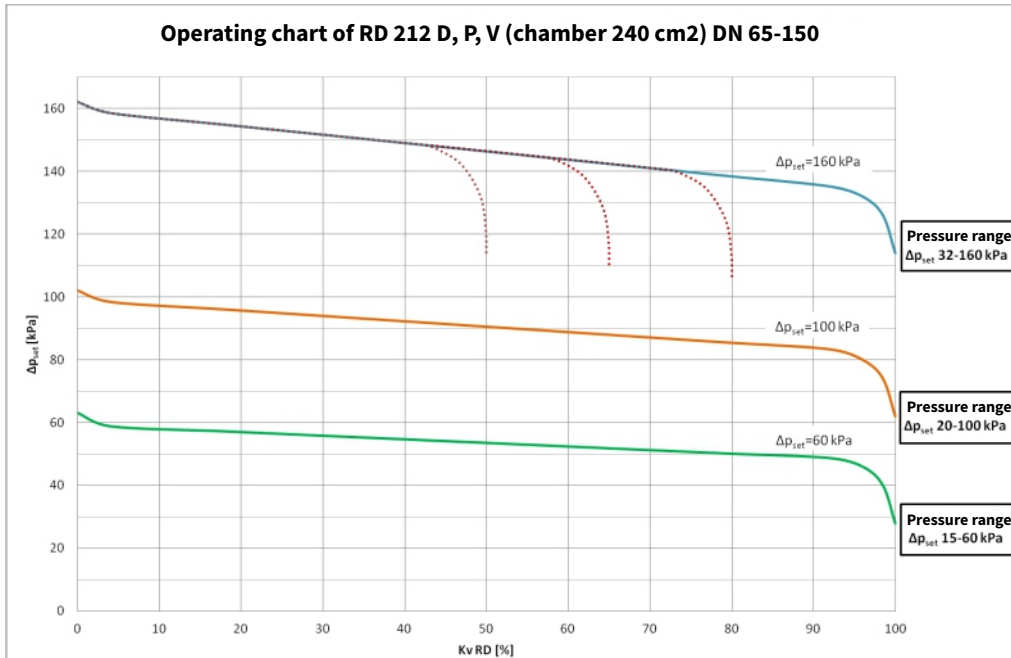

..... Examples of curve characteristic for RD 212 P in dependence on the flow restrictor setting

All presented curves are measured in conditions of  $\Delta p_{disp} = 2 \times \Delta p_{set}$ .


All curve characteristics are reciprocally parallel upon different settings for  $\Delta p_{set}$  as long as pressure quantity remains within setting range

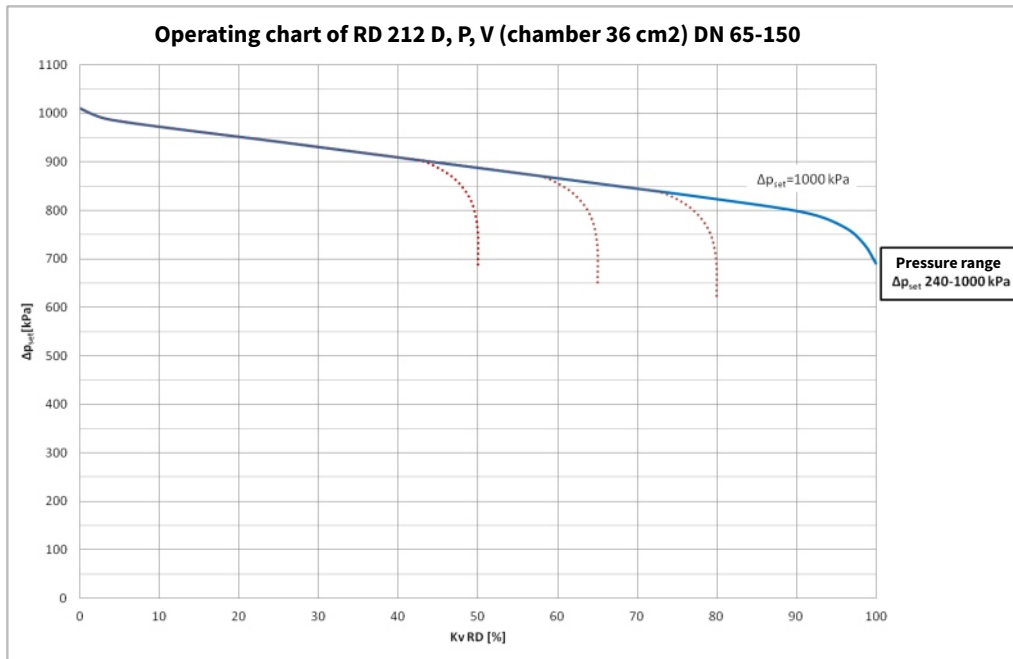



..... Examples of curve characteristic for RD 212 P proportional to the flow restrictor setting

All presented curves are measured in conditions of  $\Delta p_{disp} = 2 \times \Delta p_{set}$ . Curve characteristics are reciprocally parallel upon different settings for as long as pressure quantity remains within setting range

### Operating charts of RD 213 R, RD 213 S the valve opens upon increase of pressure / pressure difference)

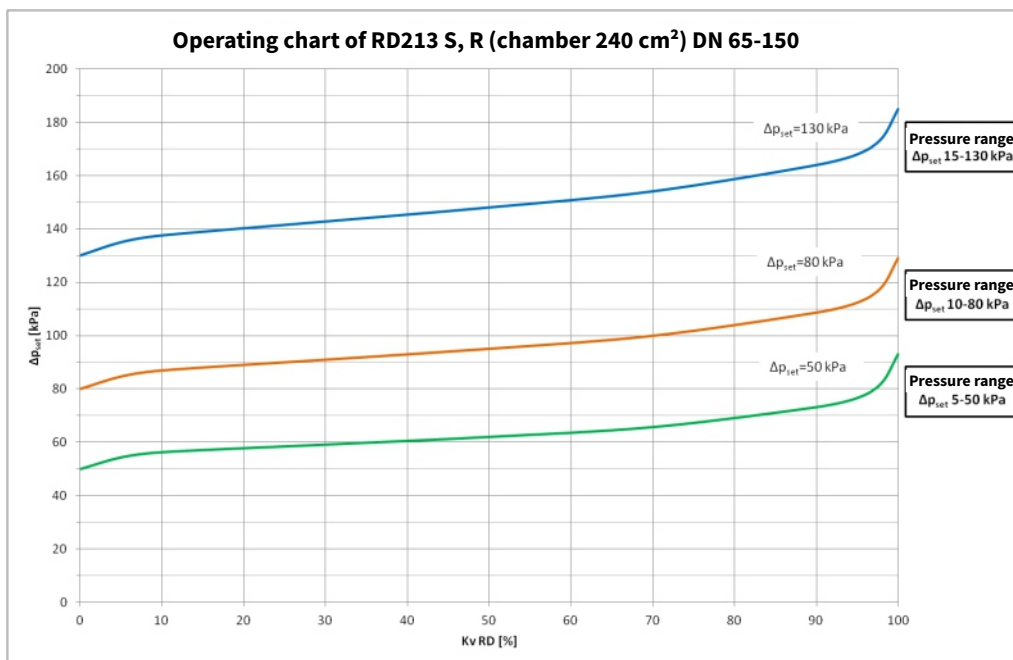


All presented curves are measured in conditions of  $\Delta p_{RD T} = 100$  kPa  
All curve characteristics are reciprocally parallel upon different settings for  $\Delta p_{set}$   
as long as pressure quantity remains within setting range

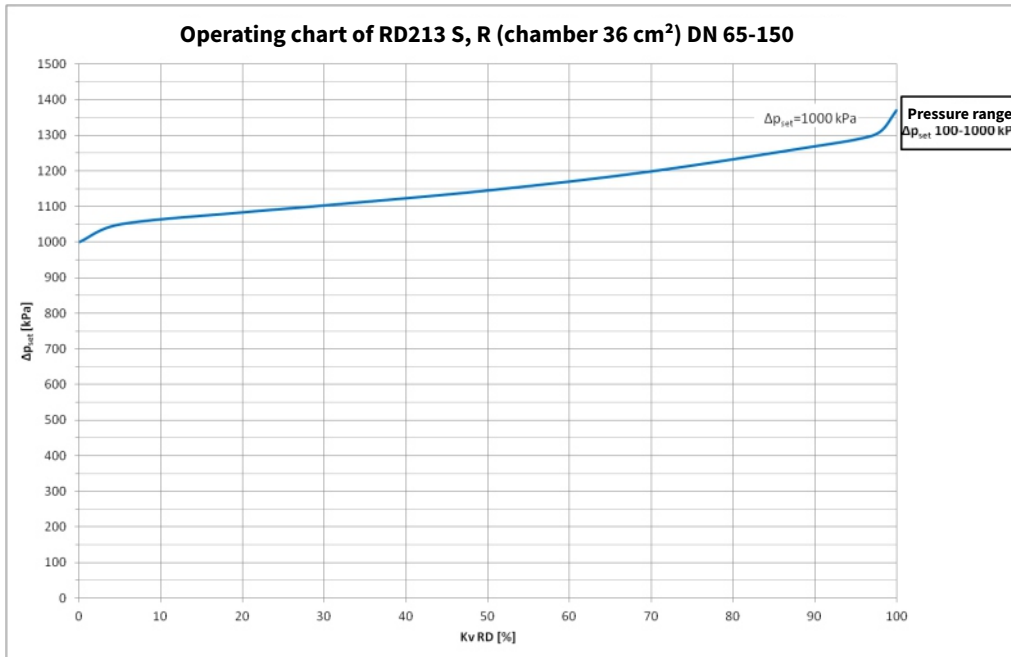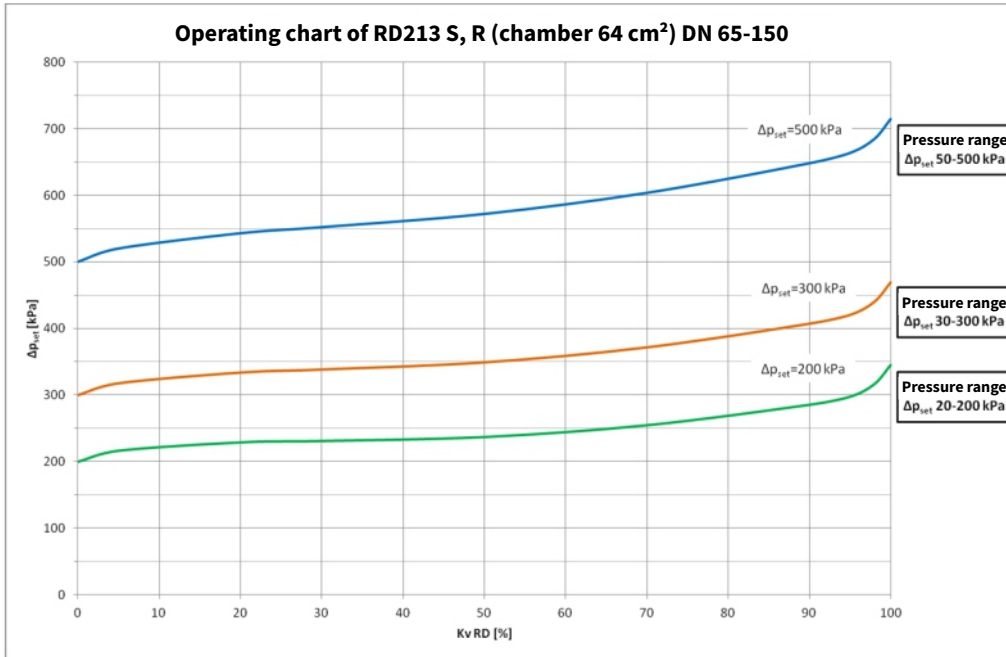

All presented curves are measured in conditions of  $\Delta p_{RT} = 100 \text{ kPa}$   
 Curve characteristics are reciprocally parallel upon different settings for  $\Delta p_{set}$   
 as long as pressure quantity remains within setting range

## RD 212 P - function of Kv value in dependence on flow restrictor setting

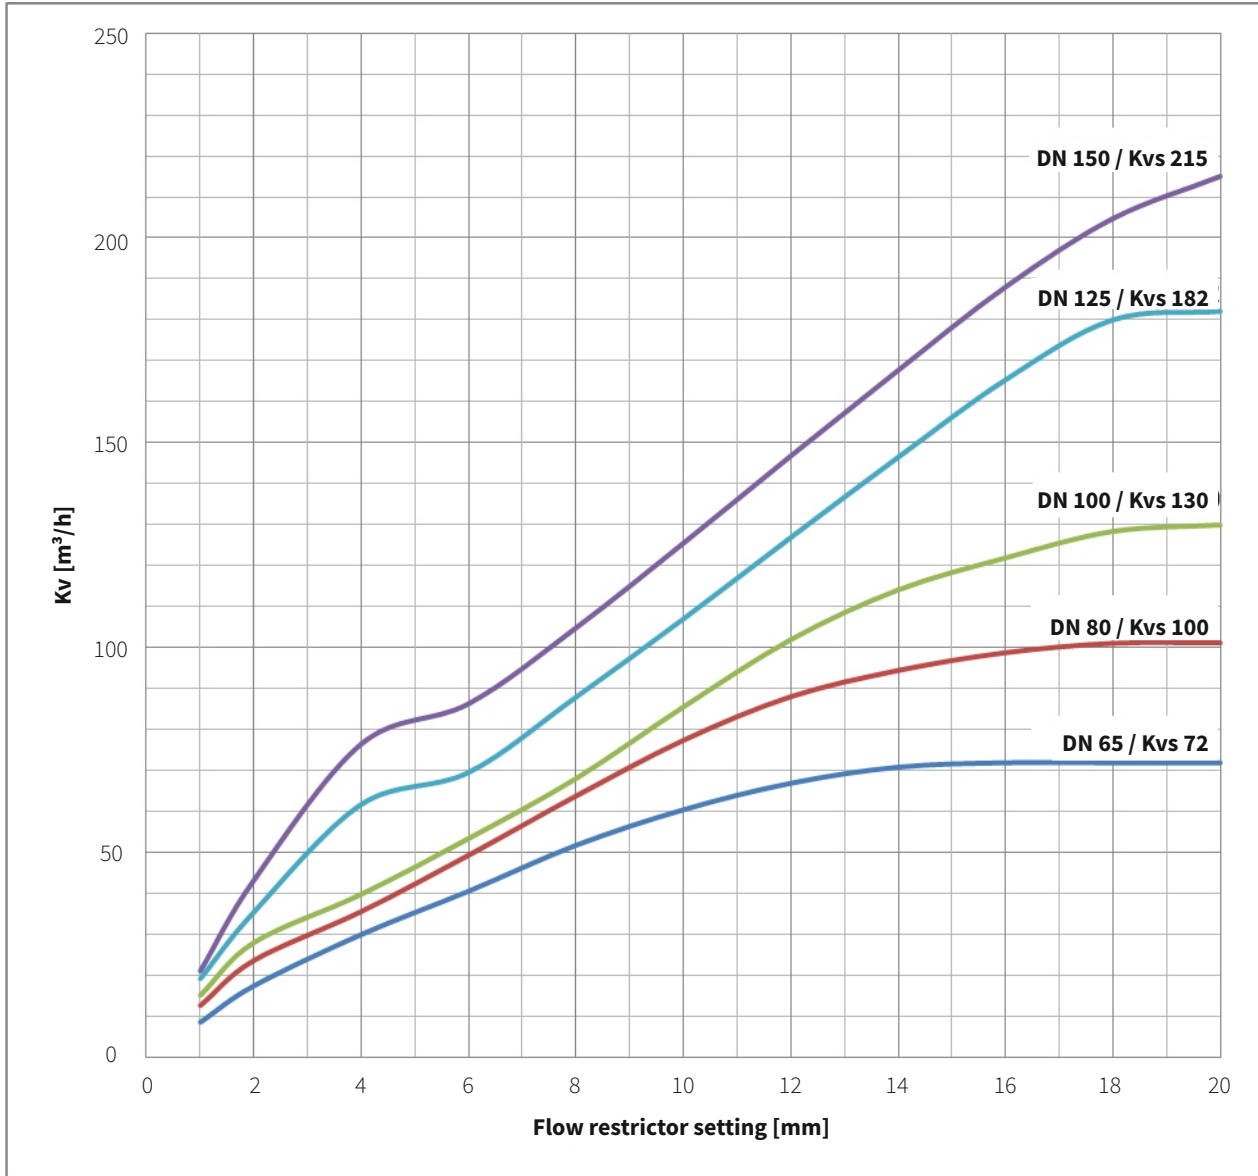

### Maximum permissible pressure values [MPa] according to ČSN EN 1092-2

Material	PN	Temperature [°C]				
		RT <sup>1)</sup>	100	120	150	180
Nodular cast iron	16	1,60	1,60	1,60	1,55	1,50
EN-JS1025	25	2,50	2,50	2,50	2,43	2,35

1) -10°C to 50°C



**LDM, spol. s r.o.**  
**Litomyšlská 1378**  
**560 02 Česká Třebová**  
**Czech Republic**

tel.: +420 465 502 511  
fax: +420 465 533 101  
e-mail: sale@ldm.cz

**LDM, spol. s r.o.**  
**Office Prague**  
**Podolská 50**  
**147 01 Praha 4**  
**Czech Republic**

tel.: +420 241 087 360  
fax: +420 241 087 192  
e-mail: sale@ldm.cz

**LDM, spol. s r.o.**  
**Office Ústí nad Labem**  
**Ladova 2548/38**  
**400 11 Ústí nad Labem**  
**- Severní Terasa**  
**Czech Republic**

tel.: +420 602 708 257  
e-mail: tomas.kriz@ldm.cz

**LDM servis, spol. s r.o.**  
**Litomyšlská 1378**  
**560 02 Česká Třebová**  
**Czech Republic**

tel.: +420 465 502 411-3  
fax: +420 465 531 010  
e-mail: servis@ldm.cz

**LDM Bratislava s.r.o.**  
**Mierová 151**  
**821 05 Bratislava**  
**Slovakia**

tel.: +421 2 43415027-8  
fax: +421 2 43415029  
e-mail: ldm@ldm.sk

**LDM, Polska Sp. z o.o.**  
**ul. Bednorza 1**  
**40 384 Katowice**  
**Poland**

tel.: +48 32 730 56 33  
fax: +48 32 730 52 33  
mobile: +48 601 354 999  
e-mail: ldmpolska@ldm.cz

**LDM Armaturen GmbH**  
**Wupperweg 21**  
**D-51789 Lindlar**  
**Germany**

tel.: +49 2266 440333  
fax: +49 2266 440372  
mobile: +49 177 2960469  
e-mail: ldmmaturen@ldmvalves.com

**OOO "LDM Promarmatura"**  
**Jubilejnyj prospekt,**  
**dom.6a, of. 601**  
**141400 Khimki Moscow Region**  
**Russia**

tel.: +7 4957772238  
fax: +7 4956662212  
mobile: +7 9032254333  
e-mail: inforus@ldmvalves.com

**TOO "LDM"**  
**Shakirova 33/1**  
**kab. 103**  
**100012 Karaganda**  
**Kazakhstan**



tel.: +7 7212 566 936  
fax: +7 7212 566 936  
mobile: +7 701 738 36 79  
e-mail: sale@ldm.kz

**LDM - Bulgaria - OOD**  
**z. k. Mladost 1**  
**bl. 42, floor 12, app. 57**  
**1784 Sofia**  
**Bulgaria**

tel.: +359 2 9746311  
fax: +359 2 9746311  
mobile: +359 888 925 766  
e-mail: ldm.bg@ldmvalves.com

# www.ldmvalves.com

LDM reserves the right to modify or improve the designs or specifications of such products at any time without notice.

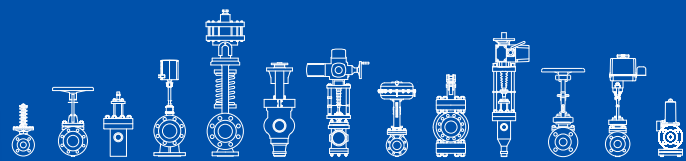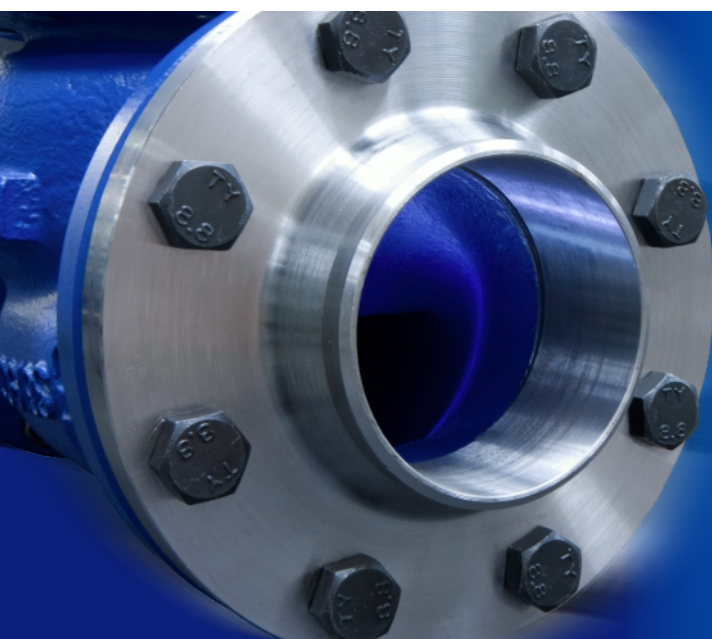

# POWER THROUGH IDEAS